

ISM

ISM



ISM
minibar

SILENT MINIBAR TECHNOLOGY

Experience the cool of silence



www.ismminibar.com





ISM Minibar was founded in an area of 7480 square meter in Manisa, 1986. After all the shares were bought by İNCİ HOLDİNG in May 2000, ISM Minibar became a part of İNCİ HOLDİNG, (www.inciholding.com) ISM Minibar completed the necessary investments in a very short period by the power of the İNCİ HOLDİNG and became one of the top brands in hotel equipment sector.

ISM Minibar is a global company exporting 70% of its products more than 60 countries across 5 continents via its strong network of distributors.

Having been in a leading position in absorption cooling system since its foundation, our company has adopted the main strategic goal of becoming a main producer and supplier both at domestic and abroad markets in the hotel equipment sector.

In line with this goal, as of 2011, our company developed and launched Peltier Seri minibars which have considerably low energy consumption and have 0 dB noise level as absorption type system. We describe Peltier Seri minibars as eco-friendly minibars.

In addition to ISO 9001 Quality and Management Systems certification, ISM MINIBAR became entitled to ISO 14001 Environmental Management System, ISO 45001:2018 Management System Certifications and also has TUV GS, TUV CB, EAC, G-Mark, ROHS, UL and UL NOM product certifications.

ISM Minibar has become a well-known brand in the hotel equipment sector with its fast growing OEM, international and local sales channels, developing R&D projects and efficient after sales services. Minibar has been listed as 'Preferred Supplier' for most of the hotel chains.

We continue to boost our production quality, products, brand popularity and market share in a stable way with an effort to meet the new trends and expand our portfolio.



PELTIER SERIES



Peltier Technology is based on an effect, which was discovered by the French physicist Peltier in 1834. It occurs when a current is passed through two dissimilar metals or semiconductors that are connected to each other junctions. The current drives a transfer of heat from one junction to the other; one junction cools off while the other heats up; as a result, this effect is used for thermoelectric cooling.


PELTIER SERIES STANDARD FEATURES

- | | |
|----------------------------|---|
| Led Light | Standard |
| Automatic Defrost | Standard |
| Reversible Door | Standard |
| Curved Door | Standard |
| Thermostat Control | Electronic |
| 1,5 Lt Bottle Holder Shelf | Standard (40Lt, 52Lt, 60Lt) |
| | Transparent / White Plastic coated wire shelf |


COLOR RANGE



Black




White



Grey (Metallic)




Sliding hinge for built in use



Transparent shelves



Intelligent LED Light



Special designed evaporator



1,5 LT Bottle holder (40 LT/52 LT/60LT)



Reversible door



Lock (Optional)



SM 40 DM

Gross Volume	44
Net Volume	41
External Dimensions (HxWxD/mm)	417 x 549 x 483
Packed Dimensions (HxWxD/mm)	465 x 590 x 515
Compartment Type	Kiler / Cellar
Cooling System	Thermoelectric
Energy Consumption (kWh/Year)	120
Energy Efficiency Index (EEI)	97
Climate Class	N (16C°-32C°)
Storage Temperature	8 - 14 °C
Gross Weight	16,50 kg
Net Weight	15,20 kg
Power	60 W
Voltage / Frequency	100-240 V / 50-60 Hz.
"Container Loading Capacity 20'/40'/40'HC" Shelf	144 - 304 - 304 Transparent/White plastic Plastic coated wire shelf





SM 271 TH - SM 271 THG

	SM 271 TH	SM 271 THG
Gross Volume	24	28
Net Volume	23	27
External Dimensions (HxWxD/mm)	512 x 384 x 397	
Packed Dimensions (HxWxD/mm)	559 x 432 x 464	
Compartment Type	Kiler / Cellar	
Cooling System	Thermoelectric	
Energy Consumption (kWh/Year)	92	175
Energy Efficiency Index (EEI)	117	223
Climate Class	N (16°C-32°C)	
Storage Temperature	8 - 14 °C	
Gross Weight	10,75 kg	13,25 kg
Net Weight	9,45 kg	11,95 kg
Power	60 W	
Voltage / Frequency	100-240 V / 50-60 Hz.	
"Container Loading Capacity 20'/40'/40'HC"	260 - 520 - 520 Plastic Coated Wire	



SM 301 TH - SM 301 THG

	SM 301 TH	SM 301 THG
Gross Volume	30	35
Net Volume	26	31
External Dimensions (HxWxD/mm)	512 x 419 x 397	
Packed Dimensions (HxWxD/mm)	559 x 442 x 464	
Compartment Type	Kiler / Cellar	
Cooling System	Thermoelectric	
Energy Consumption (kWh/Year)	92	191
Energy Efficiency Index (EEI)	117	242
Climate Class	N (16°C-32°C)	
Storage Temperature	8 - 14 °C	
Gross Weight	11,50 kg	14,00 kg
Net Weight	10,20 kg	12,70 kg
Power	60 W	
Voltage / Frequency	100-240 V / 50-60 Hz.	
"Container Loading Capacity 20'/40'/40'HC"	260 - 520 - 520 Transparent	



SM 401 TH - SM 401 THG

	SM 401 TH	SM 401 THG
Gross Volume	38	44
Net Volume	33	40
External Dimensions (HxWxD/mm)	566 x 441 x 432	
Packed Dimensions (HxWxD/mm)	614 x 464 x 494	
Compartment Type	Kiler / Cellar	
Cooling System	Thermoelectric	
Energy Consumption (kWh/Year)	97	295
Energy Efficiency Index (EEI)	123	371
Climate Class	N (16°C-32°C)	
Storage Temperature	8 - 14 °C	
Gross Weight	12,85 kg	15,85 kg
Net Weight	11,55 kg	14,55 kg
Power	60 W	
Voltage / Frequency	100-240 V / 50-60 Hz.	
"Container Loading Capacity 20'/40'/40'HC"	165 - 360 - 480 Transparent	



PELTIER SERIES




SM 521-TH

Gross Volume	43
Net Volume	38
External Dimensions (HxWxD/mm)	610 x 441 x 432
Packed Dimensions (HxWxD/mm)	659 x 464 x 494
Compartment Type	Kiler / Cellar
Cooling System	Thermoelectric
Energy Consumption (kWh/Year)	109
Energy Efficiency Index (EEI)	137
Climate Class	N (16°C-32°C)
Storage Temperature	8 - 14 °C
Gross Weight	13,75 kg
Net Weight	12,45 kg
Power	60 W
Voltage / Frequency	100-240 V / 50-60 Hz.
"Container Loading Capacity 20'/40'/40'HC"	165 - 360 - 450 Transparent

SM 601-TH

Gross Volume	54
Net Volume	48
External Dimensions (HxWxD/mm)	566 x 477 x 497
Packed Dimensions (HxWxD/mm)	623 x 499 x 554
Compartment Type	Kiler / Cellar
Cooling System	Thermoelectric
Energy Consumption (kWh/Year)	192
Energy Efficiency Index (EEI)	210
Climate Class	N (16°C-32°C)
Storage Temperature	8 - 14 °C
Gross Weight	14,85 kg
Net Weight	13,55 kg
Power	60 W
Voltage / Frequency	100-240 V / 50-60 Hz.
"Container Loading Capacity 20'/40'/40'HC"	132 - 276 - 368 Transparent

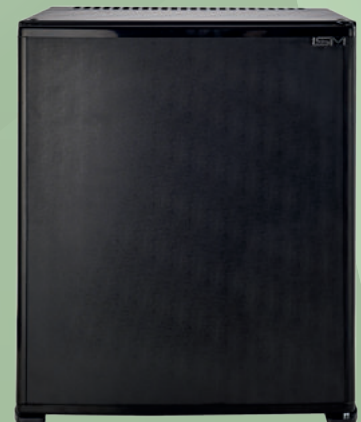



RETRO minibar

STANDARD FEATURES

- Led Light
- Autodefrost
- Electronic thermostat control
- 1,5 lt bottle holder
- Glass body shelf
- Crystal door shelf
- Freestanding

OPTIONS

- Foot
- Color range: Red- Green -Yellow

Gross Volume	43 lt
Net Volume	38 lt
External Dimensions(H*W*D)	787*438*492
Packed Dimensions(H*W*D)	745*490*540
Compartment Type	Cellar/Kiler
Cooling System	Thermoelectric
Energy Consumption(kWh/year)	109
Energy Efficiency Index(EEI)	137,5
Climate Class	G
Storage Temperature	8 - 14
Gross Weight	20,5
Net Weight	18,3
Power (W)	60
Voltage/Frequency (V/Hz)	100-240 V / 50-60 Hz.
Container Loading Capacity	20/40dc/40hc 72-160-160



PLATINUM SERIES


COLOR RANGE



Black




White




Grey (Metallic)



Sliding hinge for built in use



Blue transparent shelf



Intelligent LED Light shelf



1,5 LT Bottle holder (40 LT/52 LT/60LT)



Reversible door



Lock (Optional)

STANDARD FEATURES

	SM 301	SM 401
Led Light	Standard	Standard
Automatic Defrost	Standard	Standard
Reversible Door	Standard	Standard
Curved Door	Standard	Standard
Thermostat Control	Electronic	Electronic
1,5 Lt Bottle Holder	N/A	Yes
Shelf	Blue Transparent	Blue Transparent
Freestanding-built-in		

SM 301

Gross Volume	30
Net Volume	28
External Dimensions (HxWxD/mm)	512 x 419 x 423
Packed Dimensions (HxWxD/mm)	559 x 442 x 464
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	230
Energy Efficiency Index (EEI)	293
Climate Class	N (16C°-32C°)
Storage Temperature	8 - 14 °C
Gross Weight	13,00 kg
Net Weight	11,70 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity 20'/40'/40'HC" Shelf	260 - 520 - 520 Blue Transparent



SM 401

Gross Volume	38
Net Volume	33
External Dimensions (HxWxD/mm)	566 x 441 x 457
Packed Dimensions (HxWxD/mm)	614 x 464 x 494
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	235
Energy Efficiency Index (EEI)	298
Climate Class	N (16C°-32C°)
Storage Temperature	8 - 14 °C
Gross Weight	14,20 kg
Net Weight	12,90 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity 20'/40'/40'HC" Shelf	165 - 360 - 480 Blue Transparent



UNIQUE SERIES

STANDARD FEATURES

Led Light	Standard
Automatic Defrost	Standard
Reversible Door	Standard
Thermostat Control	Electronic
1,5 lt Bottle Holder	SM 307 N/A / SM 407 Yes
Shelf	Transparent

OPTIONAL FEATURES


Energy Supply (110 or 230 V)
 Lock
 Glass door / Inox
 Sliding hinge for free standing models
 Free standing build in

SM 307


COLOR RANGE



Black



White



Grey (Metallic)

Gross Volume	33
Net Volume	28
External Dimensions (HxWxD/mm)	511 x 441 x 457
Packed Dimensions (HxWxD/mm)	559 x 464 x 494
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	230
Energy Efficiency Index (EEL)	300
Climate Class	N (16°C-32°C)
Storage Temperature	8 - 14 °C
Gross Weight	14,80 kg
Net Weight	13,5 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity 20'/40'/40'HC"	165 - 360 - 480
Shelf	Transparent




UNIQUE SERIES



1,5 LT Bottle holder
(40 LT/52 LT/60LT)



Sliding hinge for
built in use




Intelligent LED Light



Lock (Optional)



Reversible door



Transparent shelves

SM 407

Gross Volume	37
Net Volume	33
External Dimensions (HxWxD/mm)	566 x 441 x 457
Packed Dimensions (HxWxD/mm)	614 x 464 x 494
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	235
Energy Efficiency Index (EEL)	300
Climate Class	N (16°C-32°C)
Storage Temperature	8 - 14 °C
Gross Weight	15,30 kg
Net Weight	14,00 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity 20"/40"/40"HC"	165 - 360 - 480
Shelf	Transparent




ECO SERIES




COLOR RANGE




Black



White



Grey (Metallic)



Lock (Optional)



Intelligent LED Light



Sliding hinge for built in use

STANDARD FEATURES

- | | |
|----------------------------------|------------------------------------|
| Led Light | Optional |
| Automatic Defrost | Optional |
| Reversible Door | Standard |
| Curved Door | Standard |
| Thermostat Control | Mechanic |
| 1,5 lt Bottle Holder Shelf | Standard (40-52-60) |
| Freestanding-built-in Hinge Foot | White Plastic/ Plastic coated wire |

SM 27 ECO

Gross Volume	24
Net Volume	21
External Dimensions (HxWxD/mm)	512 x 390 x 423
Packed Dimensions (HxWxD/mm)	559 x 432 x 464
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	226
Energy Efficiency Index (EEI)	290
Climate Class	N (16°C-32°C)
Storage Temperature	2 - 14 °C
Gross Weight	11,45 kg
Net Weight	10,15 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity 20"/40"/40"HC" Shelf	260 - 520 - 520 Plastic coated wire



STANDARD FEATURES

Led Light	Optional
Automatic Defrost	Optional
Reversible Door	Standard
Curved Door	Standard
Thermostat Control	Mechanic
1,5 lt Bottle Holder	N/A
Shelf	White Plastic



SM 30 ECO

Gross Volume	30
Net Volume	26
External Dimensions (HxWxD/mm)	512 x 419 x 423
Packed Dimensions (HxWxD/mm)	559 x 442 x 464
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	226
Energy Efficiency Index (EEI)	288
Climate Class	N (16C°-32C°)
Storage Temperature	2 - 14 °C
Gross Weight	11,80 kg
Net Weight	10,50 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz.
"Container Loading Capacity	260 - 520 - 520
Shelf	White plastic

STANDARD FEATURES

Led Light	Optional
Automatic Defrost	Optional
Reversible Door	Standard
Curved Door	Standard
Thermostat Control	Mechanic
1,5 lt Bottle Holder	Yes
Shelf	White Plastic



SM 40 ECO

Gross Volume	38
Net Volume	33
External Dimensions (HxWxD/mm)	566 x 441 x 457
Packed Dimensions (HxWxD/mm)	614 x 464 x 494
Compartment Type	Kiler / Cellar
Cooling System	Absorption
Energy Consumption (kWh/Year)	230
Energy Efficiency Index (EEI)	291
Climate Class	N (16C°-32C°)
Storage Temperature	2 - 14 °C
Gross Weight	13,30 kg
Net Weight	12,00 kg
Power	60 W
Voltage / Frequency	220 V-240 V / 50 - 60 Hz
"Container Loading Capacity	165 - 360 - 480
Shelf	White plastic

HAIR DRYERS



HD H 23

Two Colour Option: Black / White
1200W Power
2 Level Speed Adjustment
2 Level Heat Adjustment
Easy Wall Mounting
Fixation Screws and Secrew Anchors
87 m³/h Air Flow
685 gr Product Weight
1 Year Warranty



HD H 24

Elegant Design with Chorme Plated Parts
1600W Power /Black
2 Level Speed Adjustment
3 Level Heat Adjustment
Easy Wall Mounting
Air Collector
Fixation Screws and Secrew Anchors
87 m³/h Air Flow
1.188 gr Product Weight **(With Shaver Socket)**
1 Year Warranty



HD H 24S

Elegant Design with Chorme Plated Parts
1600W Power /White
2 Level Speed Adjustment
3 Level Heat Adjustment
Easy Wall Mounting
Air Collector
Fixation Screws and Secrew Anchors
87 m³/h Air Flow
1.188 gr Product Weight **(With Shaver Socket)**
1 Year Warranty

SAFE BOX



ISM T2-2C

Color: Ivory / Black
External Dimensions (HxWxD) 220x400x420 mm
Motorized Lock
6 Digit Display
4-6 Digit Password Identification
6 Digit Master Code
(To be able to open the safe in emergency situations)
Manual Master Key
Password Masking/De-masking Option
(While autolock when entered 4 wrong passwords)
100 Last Transaction Memory
Battery status display (weak,full)
Assembly to behind or bottom
Carpet Floor
4 Batteries
Corrosion-resistant powder coating





ISM T4 SAFE BOX TOP OPENING

SPECIFICATIONS

Color : Black (Ral9005)
Available for rental via computer
External dimensions (HxWxD) :126x465x365
Weight 10.9 kg
Packed dimensions (HxWxD) :155x480x380
Sheet thickness of the body: 1,8mm
Sheet thickness of the door: 3,3mm
Motorized Lock System
6 digit display screen
4-6 digit password identification
6 digit master code
Master key (for emergency case)
Password masking/de-masking option
Last 100 transaction memory without using hand terminal
Battery status display (weak, full)
Easy opening of the tap with double piston
Led light interior
Installation from the bottom side
Electrostatic powder paint against rust
Carpet floor
4 batteries





EAC

CE



UL US LISTED
SA4460
HOUSEHOLD
REFRIGERATOR

UL -NOM
MX

RoHS 2
2011/65/EU



ISM MAKİNE ELEKTRİK SANAYİ VE TİCARET A.Ş.

OSB I. KISIM KEÇİLİKÖY OSB MAH. ANAFARTALAR CAD. NO: 1, 45030 YUNUSEMRE/MANISA/TURKIYE
Tel: +90 (236) 233 42 33 Faks: +90 (236) 233 45 03

ismminibar

ism-minibar

ism_minibar

E-Mail : sales@ismas.com.tr